


Centre Scientifique et Technique du Bâtiment

84 avenue Jean Jaurès
CHAMPS-SUR-MARNE
F-77447 Marne-la-Vallée Cedex 2
Tél. : (33) 01 64 68 82 82
Fax : (33) 01 60 05 70 37

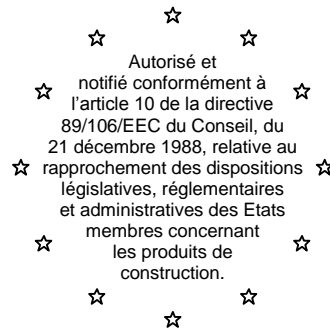

CSTB
le futur en construction

MEMBRE DE L'EOTA

European Technical Approval

ETA-01/0012

(English language translation, the original version is in French language)

Nom commercial :

Trade name:

SORMAT PFG anchor LB, ES and SB

Titulaire :

Holder of approval:

SORMAT OY

**Harjutie 5
FIN-21290 Rusko
Finlande**

Type générique et utilisation prévue du
produit de construction :

Cheville métallique en acier galvanisé, à expansion par vissage à couple contrôlé, de fixation dans le béton non fissuré : diamètres M6, M8, M10 et M12.

**Generic type and use of
construction product:**

Torque-controlled expansion anchor, made of galvanised steel, for use in non cracked concrete: sizes M6, M8, M10 and M12.

Validité du :
au :

Validity from / to:

**09/05/2011
09/05/2016**

Usine de fabrication :

Manufacturing plant:

PLANT 6

Le présent Agrément technique européen
contient :

**This European Technical Approval
contains:**

16 pages incluant 8 annexes faisant partie intégrante du document.

**16 pages including 8 annexes which form an integral part of
the document.**

This European Technical Approval replaces ETA-01/0012 with validity from 22/05/2007 to 22/05/2012

Cet Agrément Technique Européen remplace l'Agrément ETA-01/0012 valable du 22/05/2007 to 22/05/2012



Organisation pour l'Agrément Technique Européen
European Organisation for Technical Approvals

I LEGAL BASES AND GENERAL CONDITIONS

1. This European Technical Approval is issued by the Centre Scientifique et Technique du Bâtiment in accordance with:
 - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products¹, modified by the Council Directive 93/68/EEC of 22 July 1993²;
 - Décret n° 92-647 du 8 juillet 1992³ concernant l'aptitude à l'usage des produits de construction;
 - Common Procedural Rules for Requesting, Preparing and the Granting of European Technical Approvals set out in the Annex of Commission Decision 94/23/EC⁴;
 - Guideline for European Technical Approval of « Metal Anchors for use in Concrete » ETAG 001, edition 1997, Part 1 « Anchors in general » and Part 2 « Torque-controlled expansion anchors ».
2. The Centre Scientifique et Technique du Bâtiment is authorised to check whether the provisions of this European Technical Approval are met. Checking may take place in the manufacturing plant (for example concerning the fulfilment of assumptions made in this European Technical Approval with regard to manufacturing). Nevertheless, the responsibility for the conformity of the products with the European Technical Approval and for their fitness for the intended use remains with the holder of the European Technical Approval.
3. This European Technical Approval is not to be transferred to manufacturers or agents of manufacturer other than those indicated on page 1; or manufacturing plants other than those indicated on page 1 of this European Technical Approval.
4. This European Technical Approval may be withdrawn by the Centre Scientifique et Technique du Bâtiment pursuant to Article 5 (1) of the Council Directive 89/106/EEC.
5. Reproduction of this European Technical Approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of the Centre Scientifique et Technique du Bâtiment. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European Technical Approval.
6. The European Technical Approval is issued by the approval body in its official language. This version corresponds to the version circulated within EOTA. Translations into other languages have to be designated as such.

¹ Official Journal of the European Communities n° L 40, 11.2.1989, p. 12

² Official Journal of the European Communities n° L 220, 30.8.1993, p. 1

³ Journal officiel de la République française du 14 juillet 1992

⁴ Official Journal of the European Communities n° L 17, 20.1.1994, p. 34

II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

1 Definition of product and intended use

1.1. Definition of product

The PFG bolt type LB, ES and SB anchor in the range of M6 to M12 is an anchor made of galvanised steel, which is placed into a drilled hole and anchored by torque-controlled expansion. The LB version is the complete version with screw and washer. The ES version is made of the expansion system (shield, cone, ferule and coil spring) and can only be used with a steel grade 8.8 ISO 898-1 bolt and a washer whose material characteristics are given in Table 1 Annex 2. The version SB consists of a threaded rod with conical end instead of the screw and of the cone.

For the installed anchor see Figure given in Annex 1.

1.2. Intended use

The anchor is intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 of Council Directive 89/106/EEC shall be fulfilled and failure of anchorages made with these products would compromise the stability of the works, cause risk to human life and/or lead to considerable economic consequences. The anchor is to be used only for anchorages subject to static or quasi-static loading in reinforced or unreinforced normal weight concrete of strength class C 20/25 at minimum and C50/60 at most, according to EN 206-1. It may be anchored in non-cracked concrete only.

The anchor may only be used in concrete subject to dry internal conditions.

The anchor may be used for anchorages with requirements related to resistance to fire.

The provisions made in this European Technical Approval are based on an assumed intended working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

2 Characteristics of product and methods of verification

2.1. Characteristics of product

The anchor in the range of M6 to M12 corresponds to the drawings and provisions given in Annexes 1 to 4. The characteristic material values, dimensions and tolerances of the anchor not indicated in Annexes 2 and 3 shall correspond to the respective values laid down in the technical documentation⁵ of this European Technical Approval. The characteristic anchor values for the design of anchorages are given in Annex 5 and Annex 6. The characteristic anchor values for the design of anchorages regarding resistance to fire are given in Annexes 7 to 8. They are valid for use in a system that is required to provide a specific fire resistance class.

Each anchor is marked on the shields with the commercial name and the nominal diameter of the anchor : Ⓜ^{PF} M12.

The anchor shall only be packaged and supplied as a complete unit.

2.2. Methods of verification

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 has been made in accordance with the « Guideline for European Technical Approval of Metal Anchors for use in Concrete », Part 1 « Anchors in general » and Part 2 « Torque-controlled expansion anchors », on the basis of Option 8.

The assessment of the anchor for the intended use in relation to the requirements for resistance to fire has been made in accordance with the Technical Report N°020 "Evaluation of anchorages in concrete concerning resistance to fire".

3 Evaluation of Conformity and CE marking

3.1. Attestation of conformity system

The system of attestation of conformity 2 (i) (referred to as system 1) according to Council Directive 89/106/EEC Annex III laid down by the European Commission provides:

a) tasks for the manufacturer:

1. factory production control,
2. further testing of samples taken at the factory by the manufacturer in accordance with a prescribed test plan.

b) tasks for the approved body:

3. initial type-testing of the product,
4. initial inspection of factory and of factory production control,
5. continuous surveillance, assessment and approval of factory production control.

⁵ The technical documentation of this European Technical Approval is deposited at the Centre Scientifique et Technique du Bâtiment and, as far as relevant for the tasks of the approved bodies involved in the attestation of conformity procedure, is handed over to the approved bodies.

3.2. Responsibilities

3.2.1. Tasks of the manufacturer, factory production control

The manufacturer has a factory production control system in the plant and exercises permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer are documented in a systematic manner in the form of written policies and procedures. This production control system ensures that the product is in conformity with the European Technical Approval.

The manufacturer shall only use raw materials supplied with the relevant inspection documents as laid down in the prescribed test plan⁶. The incoming raw materials shall be subject to controls and tests by the manufacturer before acceptance. Check of incoming materials such as nuts, washers, wire for bolts and metal band for expansion sleeves shall include control of the inspection documents presented by suppliers (comparison with nominal values) by verifying dimension and determining material properties, e.g. tensile strength, hardness, surface finish.

The manufactured components of the anchor shall be subjected to the following tests:

- Dimensions of component parts:
 - Shields (maximum and minimum width, thickness);
 - Cone (length and width);
 - washer (diameters, thickness).
- Material properties: screw (yielding and ultimate tensile strengths, hardness), cone and shields (roughness and hardness).
- Thickness of the galvanised treatment of the elements.
- Visual control of correct assembly and of completeness of the anchor.

The frequency of controls and tests conducted during production and on the assembled anchor is laid down in the prescribed test plan taking account of the automated manufacturing process of the anchor.

The results of factory production control are recorded and evaluated. The records include at least the following information:

- designation of the product, basic material and components;
- type of control or testing;
- date of manufacture of the product and date of testing of the product or basic material and components;
- result of control and testing and, if appropriate, comparison with requirements;
- signature of person responsible for factory production control.

The records shall be presented to the inspection body during the continuous surveillance. On request, they shall be presented to the Centre Scientifique et Technique du Bâtiment.

Details of the extent, nature and frequency of testing and controls to be performed within the factory production control shall correspond to the prescribed test plan which is part of the technical documentation of this European Technical Approval.

⁶

The prescribed test plan has been deposited at the Centre Scientifique et Technique du Bâtiment and is only made available to the approved bodies involved in the conformity attestation procedure.

3.2.2. Tasks of approved bodies

3.2.2.1. Initial type-testing of the product

For initial type-testing the results of the tests performed as part of the assessment for the European Technical Approval shall be used unless there are changes in the production line or plant. In such cases the necessary initial type-testing has to be agreed between the Centre Scientifique et Technique du Bâtiment and the approved bodies involved.

3.2.2.2. Initial inspection of factory and of factory production control

The approved body shall ascertain that, in accordance with the prescribed test plan, the factory and the factory production control are suitable to ensure continuous and orderly manufacturing of the anchor according to the specifications mentioned in 2.1. as well as to the Annexes to the European Technical Approval.

3.2.2.3. Continuous surveillance

The approved body shall visit the factory at least once a year for regular inspection. It has to be verified that the system of factory production control and the specified automated manufacturing process are maintained taking account of the prescribed test plan.

Continuous surveillance and assessment of factory production control have to be performed according to the prescribed test plan.

The results of product certification and continuous surveillance shall be made available on demand by the certification body or inspection body, respectively, to the Centre Scientifique et Technique du Bâtiment. In cases where the provisions of the European Technical Approval and the prescribed test plan are no longer fulfilled the conformity certificate shall be withdrawn.

3.3. CE-Marking

The CE marking shall be affixed on each packaging of anchors. The symbol « CE » shall be accompanied by the following information:

- identification number of the certification body;
- name or identifying mark of the producer and manufacturing plant;
- the last two digits of the year in which the CE-marking was affixed;
- number of the EC certificate of conformity;
- number of the European Technical Approval;
- use category (ETAG 001-1 Option 8);
- size.

4 Assumptions under which the fitness of the product for the intended use was favourably assessed

4.1. Manufacturing

The anchor is manufactured in accordance with the provisions of the European Technical Approval using the automated manufacturing process as identified during inspection of the plant by the Centre Scientifique et Technique du Bâtiment and the approved body and laid down in the technical documentation.

4.2. Installation

4.2.1. Design of anchorages

The fitness of the anchors for the intended use is given under the following conditions:

The anchorages are designed in accordance with the « Guideline for European Technical Approval of Metal Anchors for Use in Concrete », Annex C, Method A, for torque-controlled expansion anchors under the responsibility of an engineer experienced in anchorages and concrete work.

Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored.

The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to support, etc.).

The design of anchorages under fire exposure has to consider the conditions given in the Technical Report N°020 "Evaluation of anchorages in concrete concerning resistance to fire". The relevant characteristic anchor values are given in Annex 7 Table 9 for resistance to fire under tension loads and in Annex 8 Table 10 for resistance to fire under shear loads. The design method covers anchors with a fire attack from one side only. If the fire attack is from more than one side, the design method may be taken only if the edge distance of the anchor is $c \geq 300$ mm.

4.2.2. Installation of anchors

The fitness for use of the anchor can only be assumed if the anchor is installed as follows:

- anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on the site;
- use of the anchor only as supplied by the manufacturer without exchanging the components of an anchor;
- anchor installation in accordance with the manufacturer's specifications and drawings prepared for that purpose and using the appropriate special tools;
- thickness of the fixture corresponding to the range of required thickness values for the type of anchor;
- checks before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply;
- check of concrete being well compacted, e.g. without significant voids;
- clearing the hole of drilling dust;
- anchor installation ensuring the specified embedment depth, that is the appropriate depth with shields and ferule not exceeding the concrete surface;
- keeping of the edge distance and spacing to the specified values without minus tolerances;
- positioning of the drill holes without damaging the reinforcement;

- in case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not to the anchor in the direction of load application;
- application of the torque moment given in Annex 3 using a calibrated torque wrench.

4.2.3. Responsibility of the manufacturer

It is the manufacturer's responsibility to ensure that the information on the specific conditions according to 1 and 2 including Annexes referred to in 4.2.1. and 4.2.2. is given to those who are concerned. This information may be made by reproduction of the respective parts of the European Technical Approval. In addition all installation data shall be shown clearly on the package and/or on an enclosed instruction sheet, preferably using illustration(s).

The minimum data required are:


- drill bit diameter,
- thread diameter,
- maximum thickness of the fixture,
- minimum installation depth,
- minimum hole depth,
- required torque moment,
- information on the installation procedure, including cleaning of the hole, preferably by means of an illustration,
- reference to any special installation equipment needed,
- identification of the manufacturing batch.

All data shall be presented in a clear and explicit form.


The original French version is signed by

**Le Directeur Technique
C. BALOCHE**

SORMAT PFG anchor

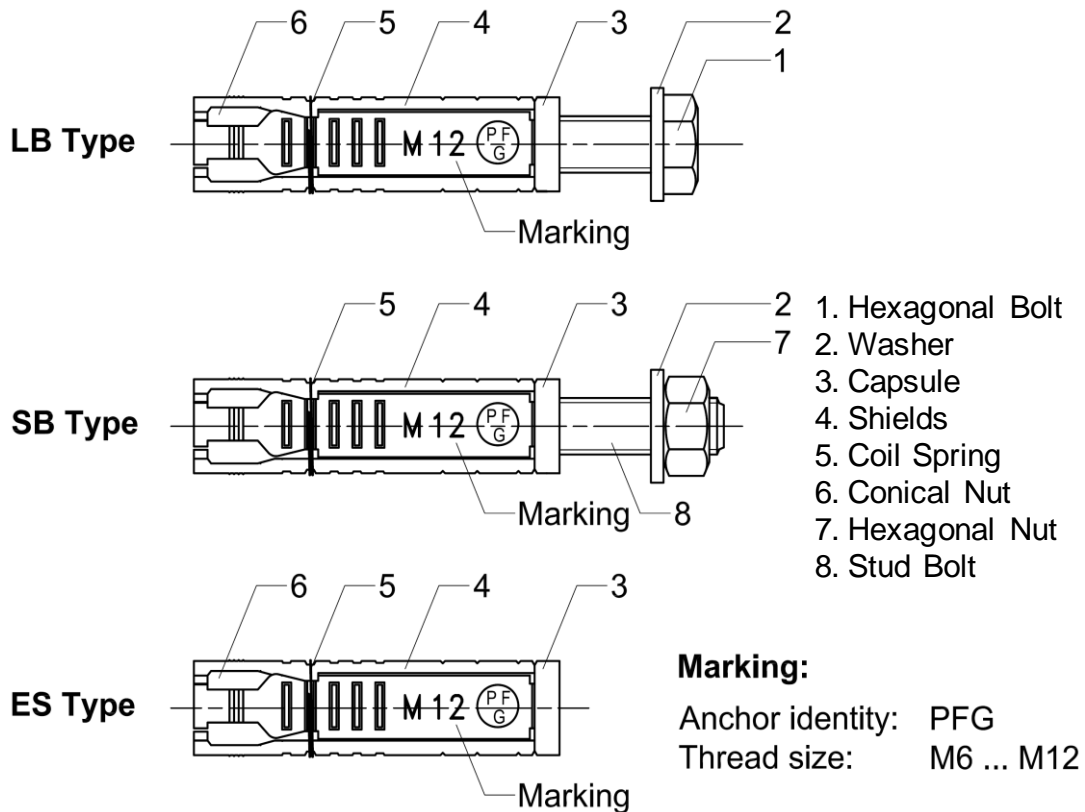

SORMAT PFG anchor after installation (LB type)

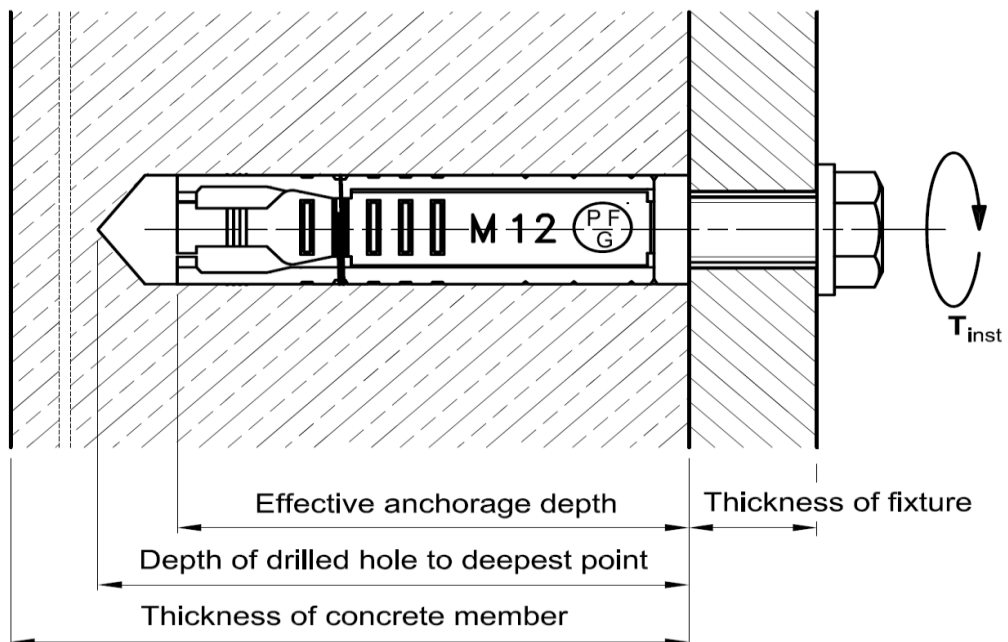

SORMAT PFG anchor LB / SB / ES

Product and intended use

Annex 1

of European
 Technical Approval
 ETA-01/0012

SORMAT PFG anchor

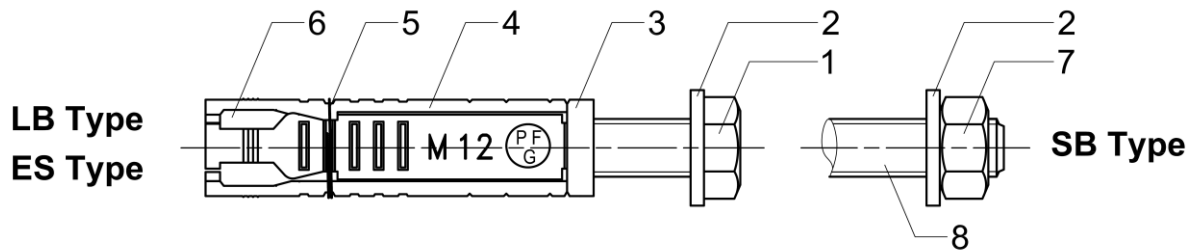


Table 1 : Materials ¹⁾

Part	Designation	Material	Coating ²⁾
1	Hexagonal Bolt	EN ISO 4017 (DIN 933) / EN ISO 4014 (DIN 931) EN ISO 898-1: grade 8.8	zinc electroplated
2	Washer	EN ISO 7089 or EN ISO 7093	zinc electroplated
3	Capsule	Cold formed steel	zinc electroplated
4	Shields	Cold formed D 6-2 K 40 / JIS 3113	zinc electroplated
5	Coil Spring	Steel wire DIN 17223 BL1, Class B	-
6	Conical Nut	EN 20898-2: grade 8	zinc electroplated
7	Hexagonal Nut	EN ISO 4032 / DIN 934 EN 20898-2: grade 8	zinc electroplated
8	Stud Bolt	EN ISO 898-1: grade 8.8	zinc electroplated

¹⁾ The same type of anchor with sherardized / blackdized shields is not covered by this ETA.

²⁾ Parts 1-4 and 6-8 are zinc electroplated according to EN ISO 4042 $\geq 5\mu\text{m}$ and bright passivated.


SORMAT PFG anchor LB / SB / ES

Materials

Annex 2

of European
Technical Approval
ETA-01/0012

SORMAT PFG anchor

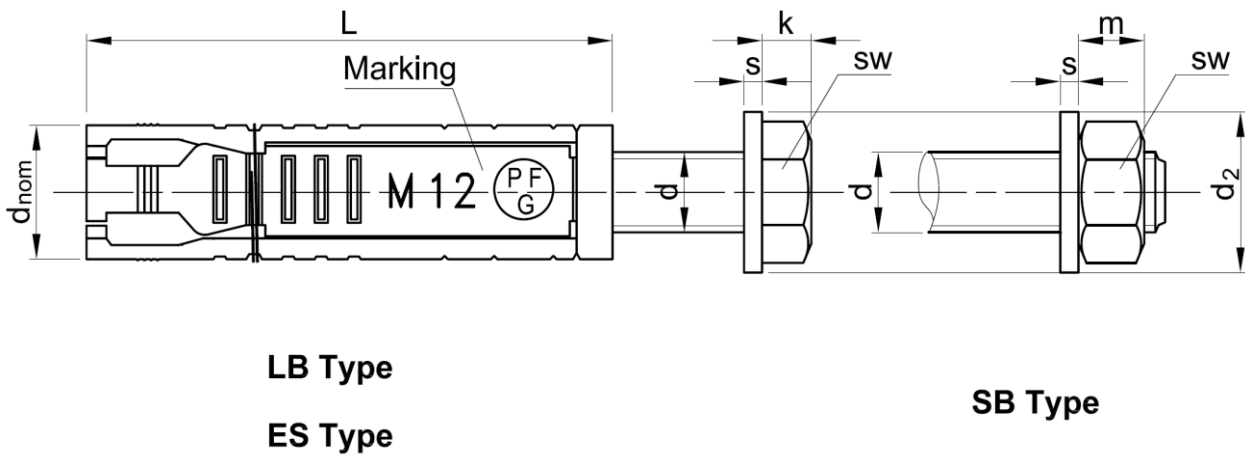

LB Type

ES Type

SB Type

Table 2: Dimensions of the anchor

Main dimensions					Washer ^{*1)}			Hexagonal Bolt ^{*2)} (LB type)		Hexagonal Nut ^{*3)} (SB type)	
Anchor type LB / SB / ES	Size	L [mm]	d [mm]	d _{nom} [mm]	s [mm]	d ₁ [mm]	d ₂ [mm]	sw [mm]	k [mm]	sw [mm]	m [mm]
6 - t _{fix}	M6	40	6	10	1,6	6,4	12 / 18	10	4,0	10	5,2 / 6,5
8 - t _{fix}	M8	50	8	14	1,6 / 2	8,4	16 / 24	13	5,3	13	6,8 / 8,0
10 - t _{fix}	M10	60	10	16	2 / 2,5	10,5	20 / 30	16 / 17	6,4	16 / 17	8,4 / 10
12 - t _{fix}	M12	80	12	20	2,5 / 3	13,0	24 / 37	18 / 19	7,5	18 / 19	10,8 / 13

^{*1)}: EN ISO 7089 / EN ISO 7093

^{*2)}: EN ISO 4017 and EN ISO 4014 / DIN 933 and DIN 931

^{*3)}: EN ISO 4032 / DIN 934

SORMAT PFG anchor LB / SB / ES

Dimensions of the anchor

Annex 3

of European
Technical Approval
ETA-01/0012

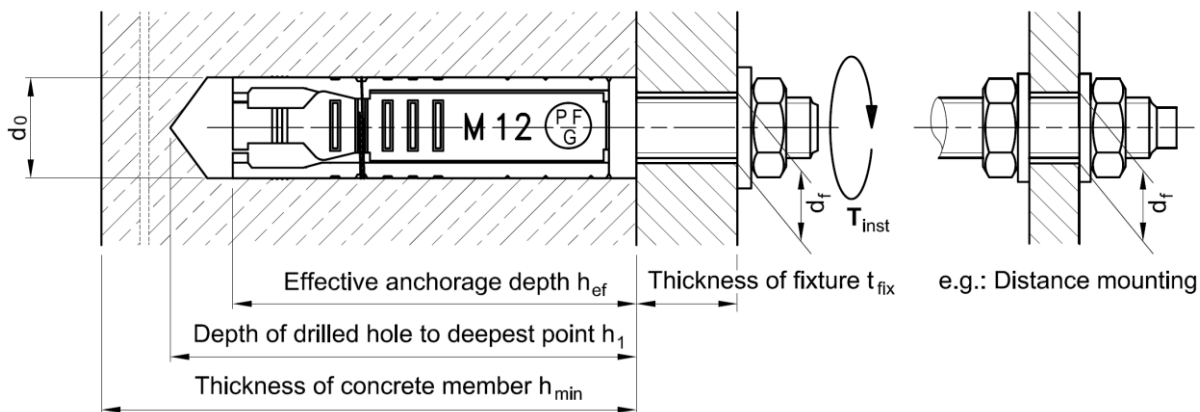


Table 3: Installation data

SORMAT PFG anchor LB / SB / ES		Anchor size			
		M6	M8	M10	M12
Drill hole diameter	d_0 [mm]	10	14	16	20
Cutting diameter at the upper tolerance limit (maximum diameter bit)	$d_{cut,max} \leq$ [mm]	10,45	14,5	16,5	20,55
Depth of drilled hole to deepest point	$h_1 \geq$ [mm]	45	55	65	85
Effective anchorage depth	h_{ef} [mm]	40	50	60	80
Diameter of clearance hole in the fixture	$d_f \leq$ [mm]	7	9	11	13
Thickness of fixture	$t_{fix,min...max}$ [mm]	0...100	0...120	0...140	0...160
Required torque	T_{inst} [Nm]	10	25	50	85

Table 4: Minimum thickness of concrete member, spacing and edge distance

SORMAT PFG anchor LB / SB / ES		Anchor size			
		M6	M8	M10	M12
Minimum thickness of concrete member	h_{min} [mm]	100	100	120	160
Minimum spacing	s_{min} [mm]	60	75	90	120
Minimum edge distance	c_{min} [mm]	60	75	90	120

SORMAT PFG anchor LB / SB / ES	Annex 4 of European Technical Approval ETA-01/0012
Installation data, Minimum thickness of concrete member, Spacing and edge distance	

Table 5: Design method A - Characteristic values for tension loads

SORMAT PFG anchor LB / SB / ES			Anchor size			
			M6	M8	M10	M12
Steel failure						
Characteristic resistance (reduced part)	$N_{Rk,s}$	[kN]	16	29	46	67
Partial safety factor	$\gamma_{Ms}^{1)}$	[-]	1,50			
Pull-out failure						
Characteristic resistance in non-cracked concrete C20/25	$N_{Rk,p}$	[kN]	5	9	12	16
Partial safety factor	$\gamma_{Mp}^{1)}$	[-]	1,50 ²⁾			
Concrete cone failure						
Effective anchorage depth	h_{ef}	[mm]	40	50	60	80
Spacing	$s_{cr,N}$	[mm]	120	150	180	240
Edge distance	$c_{cr,N}$	[mm]	60	75	90	120
Partial safety factor	$\gamma_{Mc}^{1)}$	[-]	1,50 ²⁾			
Concrete splitting failure						
Spacing (splitting)	$s_{cr,sp}$	[mm]	240	300	360	480
Edge distance (splitting)	$c_{cr,sp}$	[mm]	120	150	180	240
Partial safety factor	$\gamma_{Msp}^{1)}$	[-]	1,50 ²⁾			

¹⁾ In absence of other national regulations.

²⁾ The installation safety factor of $\gamma_2 = 1,0$ is included.

Table 6 : Displacements under tension loads

SORMAT PFG anchor LB / SB / ES			Anchor size			
			M6	M8	M10	M12
Non-cracked concrete C20/25 - C50/60	N	[kN]	2,0	3,6	4,8	6,3
	δ_{N0}	[mm]	0,1	0,1	0,1	0,1
	δ_{Nz}	[mm]	0,3	0,3	0,3	0,3

SORMAT PFG anchor LB / SB / ES

Annex 5

**Design method A :
Characteristic values for tension loads and displacements**

of European
Technical Approval
ETA-01/0012

Table 7: Design method A - Characteristics values for shear loads

SORMAT PFG anchor LB / SB / ES			Anchor size			
			M6	M8	M10	M12
Steel failure without lever arm						
Characteristic resistance	$V_{Rk,s}$	[kN]	8	14	23	33
Partial safety factor	$\gamma_{Ms}^{1)}$	[-]	1,25			
Steel failure with lever arm						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	12	30	60	105
Partial safety factor	$\gamma_{Ms}^{1)}$	[-]	1,25			
Concrete pryout failure						
Factor in equation (5.6) of ETAG Annex C, § 5.2.3.3	k	[-]	1		2	
Partial safety factor	$\gamma_{Mcp}^{1)}$	[-]	1,50 ²⁾			
Concrete edge failure						
Effective length of anchor under shear load	l_f	[mm]	26	33	40	53
Outside diameter of anchor	d_{nom}	[mm]	10	14	16	20
Partial safety factor	$\gamma_{Mc}^{1)}$	[-]	1,50 ²⁾			

¹⁾ In absence of other national regulations.

²⁾ The installation safety factor of $\gamma_2 = 1,0$ is included.

Table 8: Displacements under shear loads

SORMAT PFG anchor LB / SB / ES			Anchor size			
			M6	M8	M10	M12
Non-cracked concrete C20/25 - C50/60	V	[kN]	4,6	8,3	13,2	19,2
	δ_{V0}	[mm]	1,5 (+0,7)	1,9 (+1,2)	2,4 (+1,2)	3,3 (+1,2)
	$\delta_{V\infty}$	[mm]	2,3 (+0,7)	2,9 (+1,2)	3,6 (+1,2)	4,9 (+1,2)

Displacement: the table shows the deformation to be expected from the anchor itself, whilst the bracket value indicates the movement between the anchor body and the hole drilled in the concrete member or the hole in the fixture.

SORMAT PFG anchor LB / SB / ES

Annex 6

**Design method A :
Characteristic values for shear loads and displacements**

of European
Technical Approval
ETA-01/0012

Table 9: Design method A - Characteristic tension resistance in non-cracked C20/25 to C50/60 under fire exposure

SORMAT PFG anchor LB / SB / ES		Anchor size															
		M6			M8			M10			M12						
Fire resistance duration	R... [min]	30	60	90	120	30	60	90	120	30	60	90	120	30	60	90	120
Steel failure																	
Characteristic resistance	$N_{Rk,s,fi}$ [kN]	0,2	0,2	0,1	0,1	0,4	0,3	0,3	0,2	0,9	0,8	0,6	0,5	1,7	1,3	1,1	0,8
Pull-out failure																	
Characteristic resistance	$N_{Rk,p,fi}$ [kN]	1,3	1,0	1,0	1,0	2,3	2,3	1,8	1,8	3,0	2,4	4,0	3,2				
Concrete cone failure																	
Characteristic resistance	$N^0_{Rk,c,fi}$ [kN]	1,8	1,5	1,5	1,5	3,2	3,2	2,5	2,5	5,0	4,0	10,3	8,2				
Spacing	$s_{cr,N}$ [mm]	4 x h_{ef}															
	s_{min} [mm]	60				75				90				120			
Edge distance	$c_{cr,N}$ [mm]	2 x h_{ef}															
	c_{min} [mm]	Fire attack from one side: $c_{min} = 2 \times h_{ef}$ Fire attack from more than one side: $c_{min} \geq 300$ mm															

In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{M,fi} = 1,0$ is recommended.

Table 10: Design method A - Characteristic shear resistance in non-cracked C20/25 to C50/60 under fire exposure

SORMAT PFG anchor LB / SB / ES		Anchor size																				
		M6			M8			M10			M12											
Fire resistance duration	R... [min]	30	60	90	120	30	60	90	120	30	60	90	120	30	60	90	120					
Steel failure without lever arm																						
Characteristic resistance	$V_{Rk,s,fi}$ [kN]	0,2	0,2	0,1	0,1	0,4	0,3	0,3	0,2	0,9	0,8	0,6	0,5	1,7	1,3	1,1	0,8					
Steel failure with lever arm																						
Characteristic resistance	$M^0_{Rk,s,fi}$ [Nm]	0,2	0,1	0,1	0,1	0,4	0,3	0,3	0,2	1,1	1,0	0,7	0,6	2,6	2,0	1,7	1,3					
Concrete pryout failure																						
Factor in equation (5.6) of ETAG 001 Annex C, 5.2.3.3	k [-]	1,0			2,0			2,0			2,0			2,0								
Characteristic resistance	$V^0_{Rk,cp,fi}$ [kN]	1,8			1,5			5,1			10,0			8,0			20,6			16,5		
Concrete edge failure																						
The initial value $V^0_{Rk,c,fi}$ of the characteristic resistance in concrete C20/25 to C50/60 under fire exposure may be determined by: $V^0_{Rk,c,fi} = 0,25 \times V^0_{Rk,c}$ ($\leq R90$) $V^0_{Rk,c,fi} = 0,20 \times V^0_{Rk,c}$ (R120) with $V^0_{Rk,c}$ initial value of the characteristic resistance in cracked concrete C20/25 under normal temperature.																						
In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{M,fi} = 1,0$ is recommended.																						

SORMAT PFG anchor LB / SB / ES

Characteristic values of shear load resistance under fire exposure

Annex 8

of European Technical Approval
ETA-01/0012